

LPF 750T filter



Features


- CE Approved, Class A Screening effectiveness (EN-50083-2)
- Low Loss
- High Rejection
- Waterproof

Item no.	43794	
Pass band	5-750 MHz	
Insertion loss	5-640 MHz	0.5dB (typ.)
Insertion loss	640-750 MHz	<4dB (typ.)
Rejection	782-1006 MHz	>50dB (typ.)
Return loss	5-640 MHz	>12dB
Return loss	640-750 MHz	>10dB
Connectors	F-female F-male	
Housing	See photo	
Dimensions	16(Ø) x 68(L) mm	
Impedance	75 Ω	
Operating temperature	-20°C - +60°C	

12/1/2014 2:55:17 PM
1311.6004K12-101196-Xu

Trc1 — S21 dB Mag 10 dB/ Ref 0 dB Cal Trc2 — S11 dB Mag 5 dB/ Ref 0 dB Cal
Trc3 — S22 dB Mag 5 dB/ Ref 0 dB Cal

1

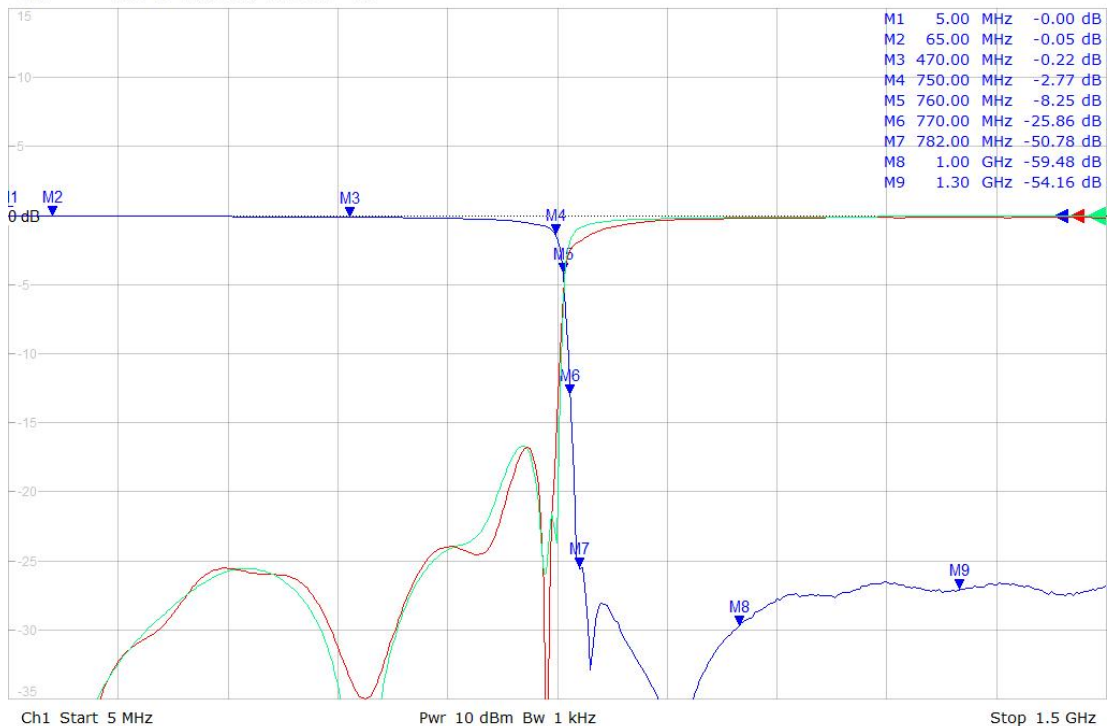

DKT COMEGA

DKT A/S
Fanoevvej 6
DK-4060 Kirke Saaby

Tlf +45 4646 2626
Fax +46 4646 2625
E-mail mail@dktomega.com
Web www.dktomega.com